

## High Efficiency, 15.0A Synchronous Boost(Step-Up) Converter with Accurate Output Current Limit

PRELIMINARY DATASHEET

### Description

FH47215 develops a high efficiency synchronous boost regulator with programmable output current limit. The device adopts adaptive constant off time and current mode control. The integrated low RDS(ON) switches minimize the conduction loss.

FH47215 features cycle by cycle peak current limit, output short circuit protection and true shutdown. The device also provides enable control and power good indicator for system sequence control.

Low output voltage ripple and small external inductor and capacitor size are achieved with programmable pseudo-constant frequency.

The FH47215 regulators are available in 18-lead QFN4.0\*4.0, packages.

### Features

- Input range: 3.0V ~16.0V
- Programmable pseudo-constant frequency
- Low  $R_{DS(ON)}$  internal switch
  - ▲ Main MOSFET: 16m $\Omega$
  - ▲ Rectified MOSFET: 18m $\Omega$
  - ▲ Disconnection MOSFET: 18m $\Omega$
- True shutdown function
- Programmable output current limit
- Internal softstart limits the inrush current
- Input voltage UVLO
- Over temperature protection
- Over voltage protection
- Output short circuit protection
- Minimum on time: 100ns typical
- Minimum off time: 120ns typical
- RoHS Compliant and Halogen Free
- Compact package: QFN4\*4-18L

#### Device Information (1)

PART NUMBER	PACKAGE	BODY SIZE (NOM)
FH47215	QFN (18)	4.00 mm × 4.00 mm

(1) For all available packages, see the orderable addendum at the end of the data sheet.

### Applications

- Portable POS
- Bluetooth Speaker
- E-Cigarette
- Fast-Charging Power Bank

### Typical Applications Schematic

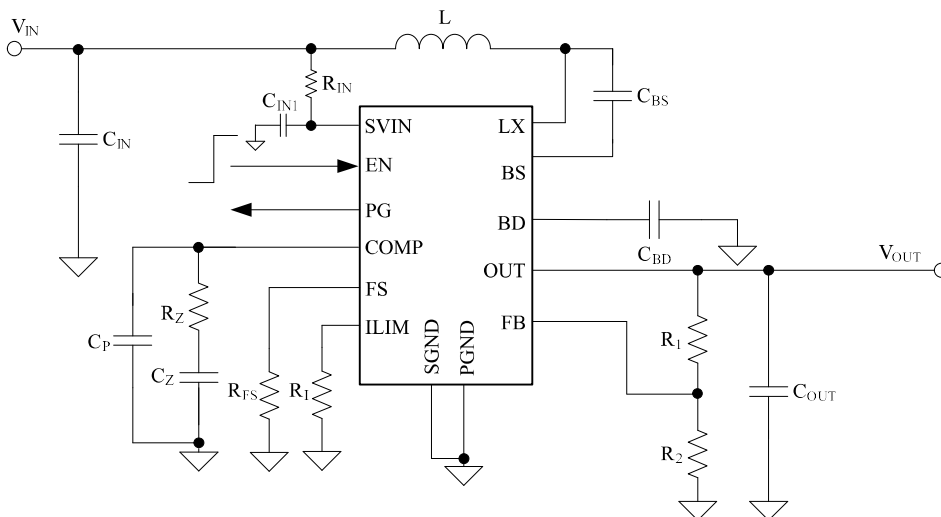


Figure 1. FH47215 Schematic Diagram


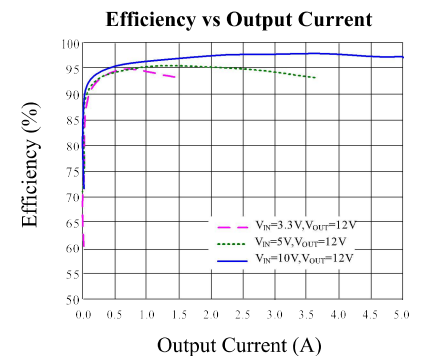


Figure 2. Efficiency vs. Output Current

**PIN CONFIGURATIONS**

**(TOP VIEW)**

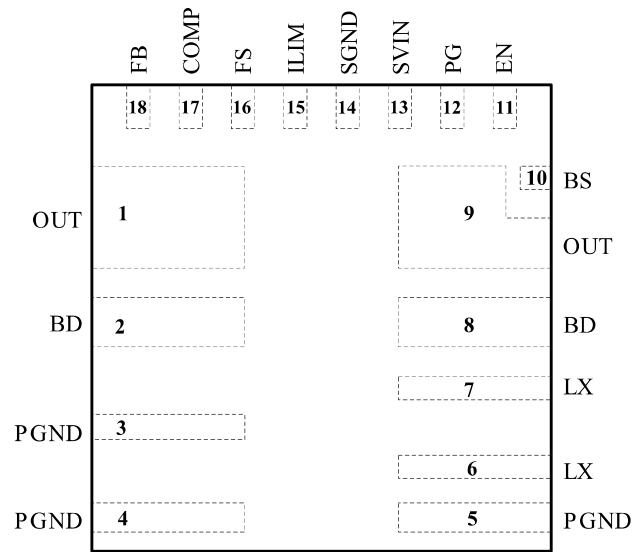


**(QFN4\*4-18L)**

**PIN DESCRIPTION**


FH47215		I/O	Pin Function
Pin No.	Pin Name		
1,9	OUT	OUT	The boost converter output pin.
2,8	BD	OUT	Connected to the Drain of internal Disconnect FET. Bypass at least 4.7μF ceramic cap to PGND.
3,4,5	PGND	OUT	Power ground pin.
6,7	LX	IN	Inductor node. Connect an inductor from power input to LX pin.
10	BS	OUT	Boot-strap pin. Supply rectified FET's gate driver. Decouple this pin to LX with 0.1uF ceramic cap.
11	EN	IN	Enable control. Pull high to turn on the IC. Do not leave it floating.
12	PG	IN	Power good indicator. Open drain output, pull low when the output < 90% of regulation voltage, high impedance otherwise.
13	SVIN	IN	IC power supply input pin. Decouple this pin to SGND pin with 1.0uF ceramic cap.
14	SGND	/	Signal ground pin.
15	ILIM	OUT	Output current limit program pin. Connect a resistor RLIM from this pin to SGND to program output current limitation threshold. $I_{LIM}(A) = 15(V) / R_{LIM}(k\Omega)$
16	FS	IN	Switching frequency setting pin. Connect a resistor from this pin to ground to program the switching frequency. $F_{SW}(kHz) = 1.4 \times 10^6 / R_{FS}(\Omega)^{0.645}$ .
17	COMP	OUT	Loop compensation pin. Connect a RC network across this pin and ground to stabilize the control loop.
18	FB	IN	Feedback pin. Connected to the center of resistor voltage divider to program the output voltage: $V_{OUT} = 1.0V \times (R1 / R2 + 1)$
/	EP	/	Thermal pad, which is recommended to connected to PGND.

## Package Outline Drawing


Type: QFN4.0\*4.0-18L

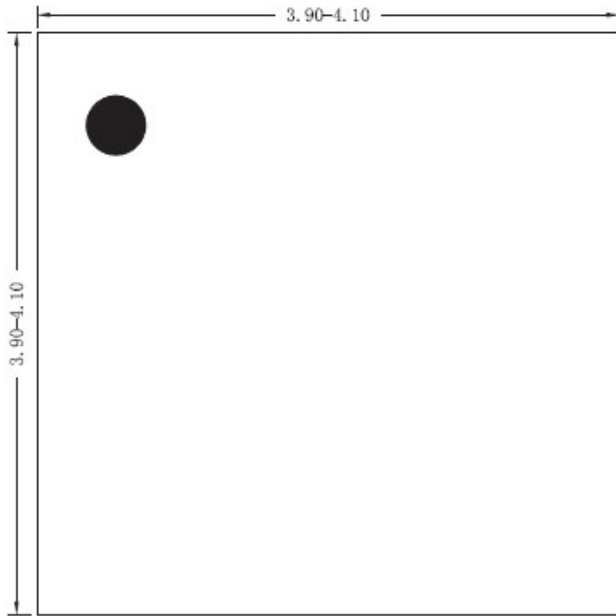


Top View

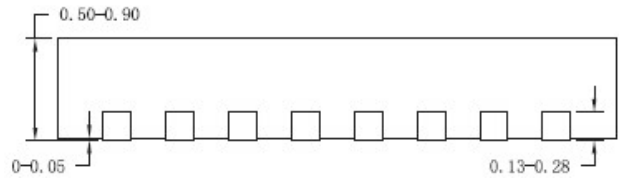

Side View

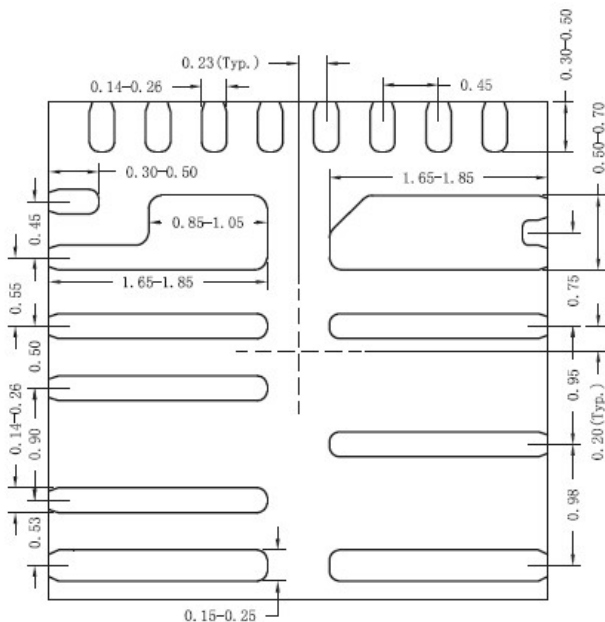

Bottom View

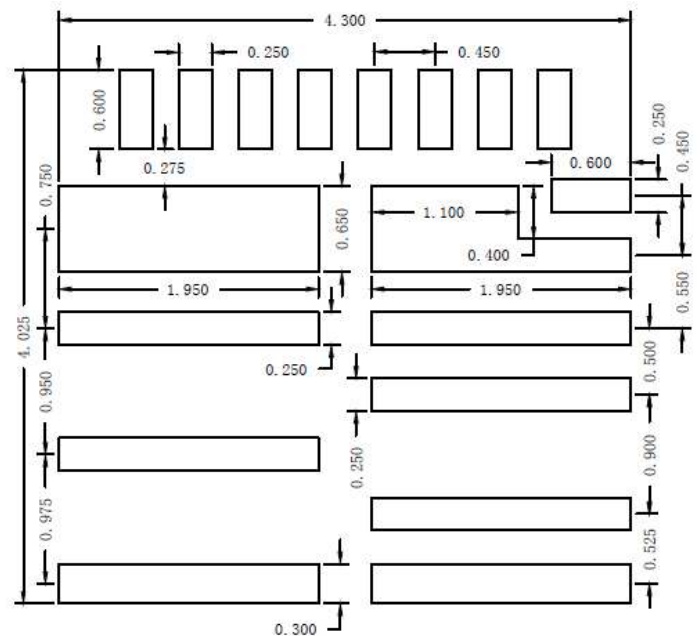

Recommended PCB layout (Reference only)

**Notes:** All dimension in MM and exclude mold flash & metal burr


## Ordering Information

Part Number	Input Voltage	Features	Operating Temperature	Package Type	Top Mark	SPQ
FH47215D18	3.0V ~ 16.0V	<ul style="list-style-type: none"> <li>• DC-DC boost (step-up)</li> <li>• Output Voltage: 16.0V</li> <li>• VFB: 1.0V</li> <li>• Frequency: 345kHz</li> <li>• Output Current: 10.0A, ILIM:15.0A</li> <li>• I<sub>Q</sub>: 230uA (Max.)</li> </ul>	-40°C to +85°C	DFN4*4-18L	BDU Y W L	5000EA/Reel

**Note:**

- **FH47215** devices are Pb-free and RoHs compliant.
- The surface prints of our semiconductor devices are subject to change during the production process and do not involve changes in electrical parameters, and we will not separately state the notice.
- If you have any other custom purchase needs, please contact our sales department.
- ForDevices reserves the right to amend and legally interpret the electrical parameters of this chip device. (<http://www.fordevices.com>)

**Device Name: DFN4\*4-18L**

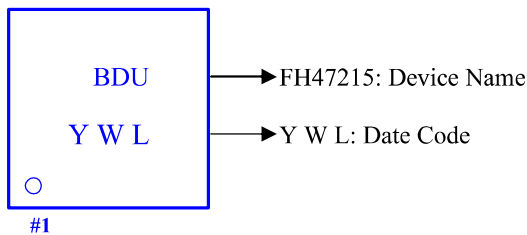

**ESD SENSITIVITY CAUTION**

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.



Product Folder



Order Now



Technical Documents



Tools & Software



Support & Community

**Note:**

- The information described herein is subject to change without notice.
- ForDevices Inc. is not responsible for any problems caused by circuits or diagrams described herein whose related industrial properties, patents, or other rights belong to third parties. The application circuit examples explain typical applications of the products, and do not guarantee the success of any specific mass-production design.
- Use of the information described herein for other purposes and / or reproduction or copying without the express permission of FocDevice Inc. is strictly prohibited.
- The products described herein cannot be used as part of any device or equipment affecting the human body, such as exercise equipment, medical equipment, security systems, gas equipment, or any apparatus installed in airplanes and other vehicles, without prior written permission of ForDevices Inc.
- Although ForDevices Inc. exerts the greatest possible effort to ensure high quality and reliability, the failure or malfunction of semiconductor products may occur. The user of these products should therefore give thorough consideration to safety design, including redundancy, fire-prevention measures, and malfunction prevention, to prevent any accidents, fires, or community damage that may ensue.

